



Rodney Industries

2025



GT060B
110mm x 420m



**MACHINE DETAILS &
PERFORMANCE DATA**

GT060B

110mm x 420m



PRESSURE AT INLET

4.6 - 10.6 Bar



FLOW RATE

623 - 1320 L/M




WETTED WIDTH (80%)

62 - 90 Mtrs




STANDARD EQUIPMENT

- Ma-Rain 26 Kit c/w solar panel and pressure switch
- SIME Reflex and nozzles
- Telescopic hydraulic feet
- Pressure gauge (glycerine bath)
- Speed equalizer
- 4 Speed gearbox
- Winding handle
- Hot galvanized chassis and reel
- Safety guards
- Water Inlet Shut-Off Valve
- PTO
- Flexible connection pipe with storage reel
- Galvanized raingun trolley mounted on variable track hard rubber wheels
- Turbine mounted on the gearbox with built-in bypass
- 5 wheel trolley
- Water filter
- Hydraulic lifting of trolley
- Hydraulic rotation of turntable
- Hydraulic lifting of drawbar



Reflex

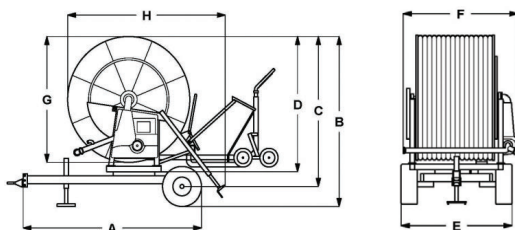

Weights and Dimensions

SIZE (cm)							
A	B	C	D	E	F	G	H
375	360	331	303	240	247	280	335

Dry Weight 3592 kg

* Please note dimensions and weights are to be used as a guide only.

OPTIONS



Emptying Compressor



No on board computer



Ma-Rain 56 Kit




Digital 4.0 Router
option for Ma-Rain 56



Wireless Measuring System
for Ma-Rain 56 computer



SIME Mariner



SIME Mariner 2 Speed



Nelson SR150 Gun



Komet 160 Ultra Kit



FREIGHT INFORMATION

The GT060B requires a crane for loading and unloading.

A low loader is suitable for transportation.



Suitable for



Medium Crops



Large Crops

GT060B 110mm x 420m

Performance Data



Noz Size mm	Gun Pres bar	Radius IRR. mt	Wetted Width mtx 80%	Capacity Lt/Min	Lt/h	M3/h	AREA POST. Ha	mm = Application Rate per Irrigated Run															
								10	15	20	25	30	35	40	50	60							
								Travel Speed / Inlet Pressure															
								m/h	bar	m/h	bar	m/h	bar	m/h	bar	m/h	bar	m/h	bar	m/h	bar		
24	3,0	39	62	623	37380	3738	2,80	60	5,1	4,0	4,9	3,0	4,8	2,4	4,7	1,7	4,7	1,5	4,6	1,2	4,6	1,0	4,6
	4,0	44	70	720	43200	4320	3,20	61	6,4	4,1	6,2	3,1	6,1	2,5	6,0	1,8	6,0	1,5	5,9	1,2	5,9	1,0	5,9
	4,5	46	74	764	45840	4584	3,36	62	7,1	4,2	6,9	3,1	6,8	2,5	6,8	1,8	6,7	1,6	6,6	1,2	6,6	1,0	6,6
	5,0	48	77	806	48360	4836	3,52	63	7,7	4,2	7,5	3,1	7,4	2,5	7,3	1,8	7,3	1,6	7,2	1,3	7,2	1,0	7,2
	5,5	49	78	844	50640	5064	3,60	65	8,4	4,3	8,2	3,2	8,1	2,6	8,0	1,8	8,0	1,6	7,9	1,3	7,9	1,1	7,9
26	3,0	41	66	732	43920	4392	2,96	67	5,4	4,5	5,2	3,3	5,1	2,7	5,0	1,9	5,0	1,7	4,9	1,3	4,9	1,1	4,9
	4,0	46	74	846	50760	5076	3,36	69	6,9	4,6	6,7	3,4	6,6	2,8	6,5	2,0	6,5	1,7	6,4	1,4	6,4	1,1	6,4
	4,5	48	77	898	53880	5388	3,52	70	7,6	4,7	7,4	3,5	7,3	2,8	7,3	2,0	7,2	1,8	7,1	1,4	7,1	1,2	7,1
	5,0	51	82	946	56760	5676	3,76	70	8,3	4,6	8,1	3,5	8,0	2,8	8,0	2,0	7,9	1,7	7,8	1,4	7,8	1,2	7,8
	5,5	52	83	992	59520	5952	3,84	72	9,0	4,8	8,8	3,6	8,7	2,9	8,7	2,0	8,6	1,8	8,5	1,4	8,5	1,2	8,5
28	3,0	44	70	848	50880	5088	3,20	72	5,9	4,8	5,7	3,6	5,6	2,9	5,5	2,1	5,5	1,8	5,4	1,4	5,4	1,2	5,4
	4,0	48	77	981	58860	5886	3,52	77	7,4	5,1	7,2	3,8	7,1	3,1	7,0	2,2	7,0	1,9	6,9	1,5	6,9	1,3	6,9
	4,5	50	80	1040	62400	6240	3,68	78	8,2	5,2	8,0	3,9	7,9	3,1	7,9	2,2	7,8	2,0	7,7	1,6	7,7	1,3	7,7
	5,0	52	83	1096	65760	6576	3,84	79	8,9	5,3	8,7	4,0	8,6	3,2	8,6	2,3	8,5	2,0	8,4	1,6	8,4	1,3	8,4
	5,5	53,5	86	1149	68940	6894	3,97	81	9,7	5,4	9,5	4,0	9,4	3,2	9,3	2,3	9,3	2,0	9,2	1,6	9,2	1,3	9,2
30	6,0	55	88	1202	72120	7212	4,09	82	10,4	5,5	10,2	4,1	10,1	3,3	10,0	2,3	10,0	2,0	9,9	1,6	9,9	1,4	9,9
	3,0	46	74	974	58440	5844	3,36	79	6,4	5,3	6,2	4,0	6,1	3,2	6,0	2,3	6,0	2,0	5,9	1,6	5,9	1,3	5,9
	4,0	50	80	1.127	67620	6762	3,68	85	8,1	5,6	7,9	4,2	7,8	3,4	7,7	2,4	7,7	2,1	7,6	1,7	7,6	1,4	7,6
	4,5	52	83	1.195	71700	7170	3,84	86	8,9	5,7	8,7	4,3	8,6	3,4	8,5	2,5	8,5	2,2	8,4	1,7	8,4	1,4	8,4
	5,0	54	86	1.260	75600	7560	4,01	88	9,7	5,8	9,5	4,4	9,4	3,5	9,3	2,5	9,3	2,2	9,2	1,8	9,2	1,5	9,2
5,5	56,5	90	1.320	79200	7920	4,22	88	10,6	5,8	10,4	4,4	10,3	3,5	10,2	2,5	10,2	2,2	10,1	1,8	10,1	1,5	10,1	

Please note: Performance data is to be used as a guide only

HOW TO READ A PERFORMANCE CHART



Noz Size mm	Gun Pres bar	Radius IRR. mt	Wetted Width mtx 80%	Capacity Lt/Min	Lt/h	M3/h	AREA POST. Ha	mm = Application Rate per Irrigated Run																	
								Travel Speed / Inlet Pressure																	
								10		15		20		25		30		35		40		50		60	
m/h		bar		m/h		bar		m/h		bar		m/h		bar		m/h		bar							
24	3,0	39	62	623	37,380	37,38	2,80	60	5,1	40	4,9	30	4,8	24	4,8	20	4,7	17	4,7	15	4,6	12	4,6	10	4,6
	4,0	44	70	720	43,200	43,20	3,20	61	6,4	41	6,2	31	6,1	25	6,1	20	6,0	18	6,0	15	5,9	12	5,9	10	5,9
	4,5	46	74	764	45,840	45,84	3,36	62	7,1	42	6,9	31	6,8	25	6,8	21	6,7	18	6,7	16	6,6	12	6,6	10	6,6
	5,0	48	77	806	48,360	48,36	3,52	63	7,7	42	7,5	31	7,4	25	7,4	21	7,3	18	7,3	16	7,2	13	7,2	10	7,2
	5,5	49	78	844	50,640	50,64	3,60	65	8,4	43	8,2	32	8,1	26	8,1	22	8,0	18	8,0	16	7,9	13	7,9	11	7,9
26	3,0	41	66	732	43,920	43,92	2,96	67	5,4	45	5,2	33	5,1	27	5,1	22	5,0	19	5,0	17	4,9	13	4,9	11	4,9
	4,0	46	74	846	50,760	50,76	3,36	69	6,9	46	6,7	34	6,6	28	6,6	23	6,5	20	6,5	17	6,4	14	6,4	11	6,4
	4,5	48	77	898	53,880	53,88	3,52	70	7,6	47	7,4	35	7,3	28	7,3	23	7,2	20	7,2	18	7,1	14	7,1	12	7,1
	5,0	51	82	946	56,760	56,76	3,76	70	8,3	46	8,1	35	8,0	28	8,0	23	7,9	20	7,9	17	7,8	14	7,8	12	7,8
	5,5	52	83	992	59,520	59,52	3,84	72	9,0	48	8,8	36	8,7	29	8,7	24	8,6	20	8,6	18	8,5	14	8,5	12	8,5
28	3,0	44	70	848	50,880	50,88	3,20	72	5,9	48	5,7	36	5,6	29	5,6	24	5,5	21	5,5	18	5,4	14	5,4	12	5,4
	4,0	48	77	981	58,860	58,86	3,52	77	7,4	51	7,2	38	7,1	31	7,1	26	7,0	22	7,0	19	6,9	15	6,9	13	6,9
	4,5	50	80	1040	62,400	62,40	3,68	78	8,2	52	8,0	39	7,9	31	7,9	26	7,8	22	7,8	20	7,7	16	7,7	13	7,7
	5,0	52	83	1096	65,760	65,76	3,84	79	8,9	53	8,7	40	8,6	32	8,6	26	8,5	23	8,5	20	8,4	16	8,4	13	8,4
	5,5	53,5	86	1149	68,940	68,94	3,97	81	9,7	54	9,5	40	9,4	32	9,4	27	9,3	23	9,3	20	9,2	16	9,2	13	9,2
	6,0	55	88	1202	72,120	72,12	4,09	82	10,4	55	10,2	41	10,1	33	10,1	27	10,0	23	10,0	20	9,9	16	9,9	14	9,9
30	3,0	46	74	974	58,440	58,44	3,36	79	6,4	53	6,2	40	6,1	32	6,1	26	6,0	23	6,0	20	5,9	16	5,9	13	5,9
	4,0	50	80	1,127	67,620	67,62	3,68	85	8,1	56	7,9	42	7,8	34	7,8	28	7,7	24	7,7	21	7,6	17	7,6	14	7,6
	4,5	52	83	1,195	71,700	71,70	3,84	86	8,9	57	8,7	43	8,6	34	8,6	29	8,5	25	8,5	22	8,4	17	8,4	14	8,4
	5,0	54	86	1,260	75,600	75,60	4,01	88	9,7	58	9,5	44	9,4	35	9,4	29	9,3	25	9,3	22	9,2	18	9,2	15	9,2
	5,5	56,5	90	1,320	79,200	79,20	4,22	88	10,6	58	10,4	44	10,3	35	10,3	29	10,2	25	10,2	22	10,1	18	10,1	15	10,1

Please note: Performance data is to be used as a guide only

- A:** Nozzle size in the Big Gun
- B:** Pressure at the Big Gun
- C:** Radius that the Big Gun will throw in the perfect conditions
- D:** Wetted width or Lane spacings
- E:** Capacity or Flow through the Irrigator. This is normally the starting point to choose the correct Marani Hard Hose Irrigator.
- F:** Area the Marani will do in one Run with overlap
- G:** Application Rate / Travel Speed / Pressure at Irrigator

Length of run 420m:

- Required flow 1000 LPM (column E)
- Required wetted width 80m (column D)
- Required 25mm water per gun (column G)

From this you know that:

- 4.7 bar is needed at the Gun (B)
- 7.9 bar at the machine (G)
- Pressure loss 7.9 - 4.7 = 3.4 bar
- Travel speed 31 meters per hour (G)

After you have got your crop requirements, (Transpiration rate) mm to be applied per run, length, width area of field you will be able to calculate the flow you need.

Data taken from GT060B110420 performance chart



Rodney Industries

Phone: 07 3624 0300

Email: sales@rodneyind.com.au

Web: www.rodneyind.com.au

