



Rodney Industries

LEAF & LINT SUCTION STRAINERS

2025



FOR
**QUALITY, RANGE
AND VALUE**
CHOOSE RODNEY INDUSTRIES

To ensure long-term durability and reliable performance, our Leaf and Lint Strainers are fitted with high-quality Stainless Steel 316 mesh baskets – a superior alternative to galvanized options.

FEATURES INCLUDE:

- Flow rates from 10 to 150 litres per second
- Corrosion-resistant polyethylene body for lightweight strength
- Galvanized swing-away toggles for quick and easy basket access
- Stainless Steel 316 mesh basket for maximum durability.

APPLICATIONS INCLUDE:


- Commercial and public swimming pools
- Resorts and aquatic centres
- Decorative water features
- Irrigation systems




TOUGH ON DEBRIS. EASY ON MAINTENANCE

At Rodney Industries, we know that quality, durability, and performance matter. That's why our Leaf and Lint Suction Strainers are built to deliver years of dependable, low-maintenance service.

- Air release outlet fitted to the lid for efficient operation
- Galvanized external fittings included as standard, with optional upgrades to Stainless Steel or G10 (epoxy/glass)
- Constructed from non-toxic, food-grade polyethylene – safe for potable water and resistant to corrosion
- Designed for easy modification, repair, or upgrade throughout the product's working life
- Customizable inlet/outlet sizes and configurations to suit your specific system requirements
- Compatible with the Rodney Industries Poly Maxi Flange – a full-face, full nominal bore solution
- We also manufacture concentric and eccentric flanged reducers in Polyethylene, Galvanized, or Stainless Steel

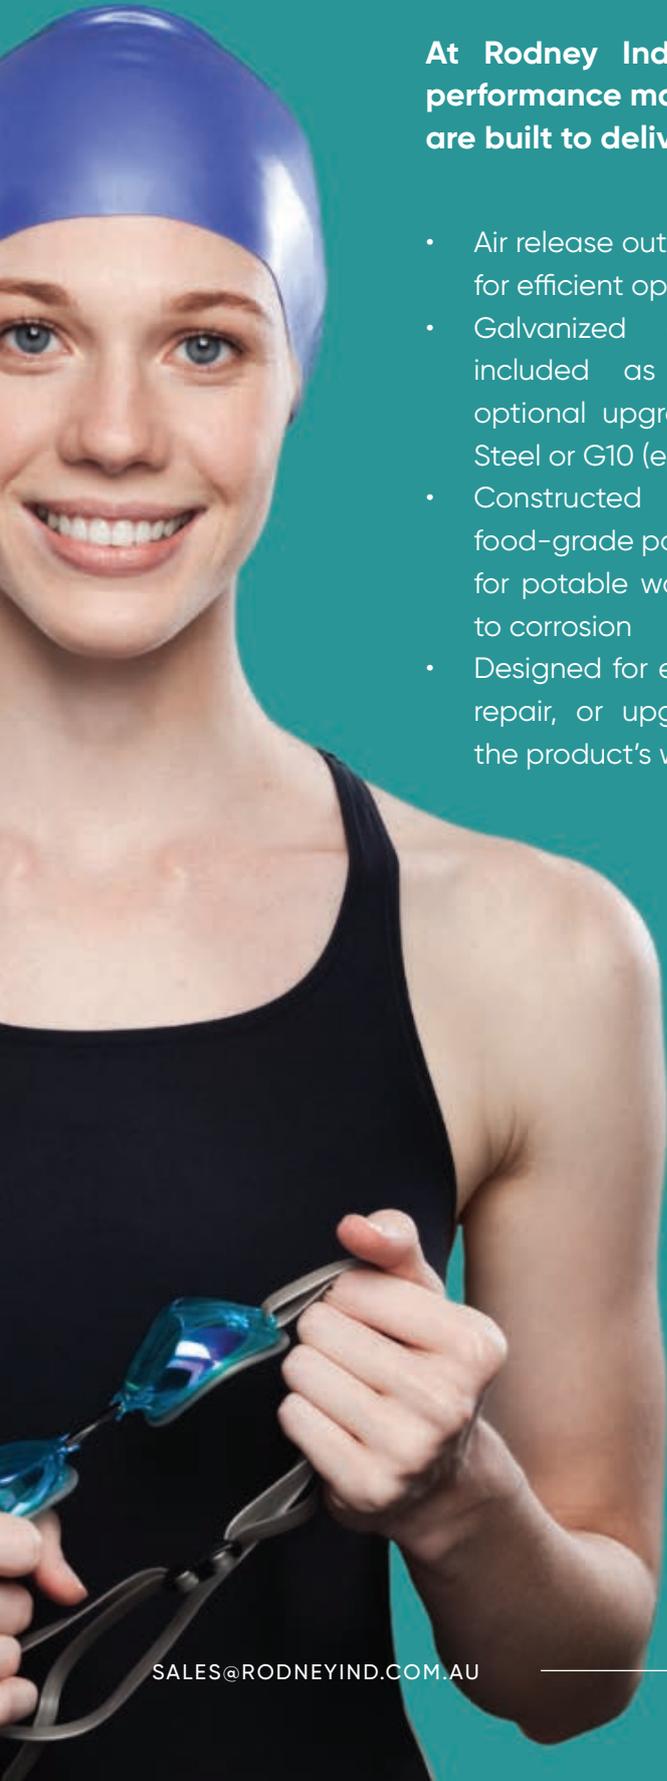

SPECIFICATIONS

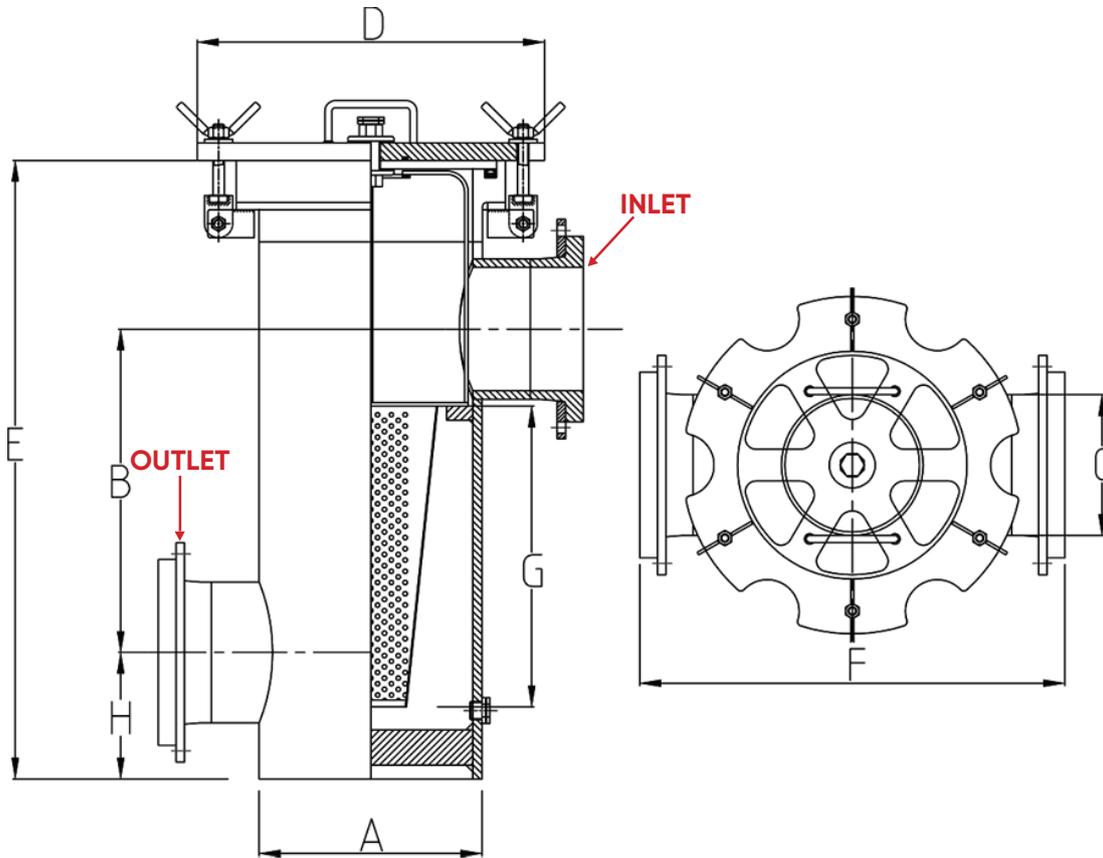

Strainer	Flow	Inlet	Outlet	A	B	C	D	E	F	G	H
LLS-010	10	90	90	315/17	500	90	480	940	600	475	180
LLS15/11090	10<15	110	90	315/17	500	110	480	940	600	475	180
LLS15/110110	10<15	110	110	315/17	500	110	480	940	600	475	180
LLS30/160110	15<30	160	110	315/17	500	160	480	940	600	475	180
LLS30/160160	15<30	160	160	315/17	500	160	480	940	600	475	180
LLS50/200160	30<50	200	160	400/17	500	200	570	990	750	475	225
LLS50/200200	30<50	200	200	400/17	500	200	570	990	750	475	225
LLS75/225200	50<75	225	200	450/21	500	225	635	1015	800	475	225
LLS75/225225	50<75	225	225	450/21	500	225	635	1015	800	475	225
LLS100/250225	75<100	250	225	500/21	560	250	680	1140	850	490	250
LLS100/250250	75<100	250	250	500/21	560	250	680	1140	850	490	250
LLS-710	TBA	355/630	355/630	710/17	766	355	900	1375	1300	n/a	760

PLEASE NOTE: OUR RANGE OF LEAF & LINT SUCTION STRAINERS ARE NOT PRESSURE RATED.



CUSTOMER SPECIFICATION FORM

To ensure your Leaf & Lint Suction Strainer is manufactured to your project specifications, please complete the following and email it to sales@rodneyind.com.au

Company:

Contact Name:

Purchase Order Number:

Inlet Size:

Inlet Height (B):

Outlet Size:

Outlet Height:

Lid Options:

Standard or Poly Carbonate (Clear)



CUSTOM-MADE LEAF & LINT SUCTION STRAINERS

At Rodney Industries, we know that no two projects are the same. If our standard range of Leaf and Lint Strainers doesn't quite fit your needs, we offer custom-built solutions tailored to your exact specifications.

Our experienced team will work closely with you to design and manufacture a strainer that delivers optimal performance, reliability, and fit – no matter the application.



Rodney Industries

Phone: 07 3624 0300

Email: sales@rodneyind.com.au

Web: www.rodneyind.com.au

